NAVAL POSTGRADUATE SCHOOL
Monterey, California

THESIS

TACTICAL HF FIELD EXPEDIENT ANTENNA PERFORMANCE
VOLUME II

by

Gurkan Turkes

March 1990

Thesis Advisor: Richard W. Adler

Approved for public release; distribution is unlimited

Unclassified

security classification of this page

REPORT DOCUMENTATION PAGE

1a Report Security Classification Unclassified		1b Restrictive Markings	
2a Security Classification Authority		3 Distribution Availability of Report Approved for public release; distribution is unlimited	
2b Declassification Downgrading Schedule			
4 Performing Organization Report Number(s)		5 Monitoring Organization Report Number(s)	
6a Name of Performing Organization Naval Postgraduate School	6b Office Symbol (*if applicable*) EC	7a Name of Monitoring Organization Naval Postgraduate School	
6c Address (*city, state, and ZIP code*) Monterey, CA 93943-5000		7b Address (*city, state, and ZIP code*) Monterey, CA 93943-5000	
8a Name of Funding Sponsoring Organization USAISEIC	8b Office Symbol (*if applicable*) ASB-SET-P	9 Procurement Instrument Identification Number	
8c Address (*city, state, and ZIP code*) Ft. Huachuca, AZ 85613		10 Source of Funding Numbers SED 13-89	
		Program Element No	Project No / Task No / Work Unit Accession No

11 Title (*include security classification*) APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.

TACTICAL HF FIELD EXPEDIENT ANTENNA PERFORMANCE VOLUME II

12 Personal Author(s) Gurkan Turkes

13a Type of Report	13b Time Covered	14 Date of Report (*year, month, day*)	15 Page Count
Master's Thesis	From To	March 1990	58

16 Supplementary Notation The views expressed in this thesis are those of the author and do not reflect the official policy or position of the Department of Defense or the U.S. Government.

17 Cosati Codes			18 Subject Terms (*continue on reverse if necessary and identify by block number*)
Field	Group	Subgroup	Computer Simulation, Numerical Electromagnetics Code (NEC), Tactical HF Field Antennas

19 Abstract (*continue on reverse if necessary and identify by block number*)

This thesis investigates the performance of various configurations of tactical High Frequency (HF) field deployable antennas in the presence of lossy earth. Antennas investigated include horizontal dipoles, short sloping wires, inverted vees, and monopoles with buried and elevated radials. Numerical models of the antennas are exercised via the Numerical Electromagnetics Code (NEC) for radiation pattern performance. Antennas are analyzed for applicability to (1) short-range Near Vertical Incident Skywave (NVIS), where high elevation radiation angles are required, (2) medium- and long-range low radiation angle use, and (3) vertically polarized low-angle radiation for ground wave communication. Good NVIS and ground wave performance occurs for horizontal dipoles. Sloping wires and sloping dipoles are similar to horizontal dipoles but exhibit a moderate amount of azimuth plane directivity. Vertical monopoles with at least 15 buried radials produce medium- and long-range skywave coverage and good ground wave performance. Four elevated radials for quarter-wavelength monopoles are shown to out-perform 15 buried radials and are much easier to erect. The larger and more difficult-to-erect inverted vee dipole slightly outperforms a monopole by virtue of modest azimuth plane directivity.

The results of this study can be included in an antenna engineering handbook and can be used to interface with existing ionospheric propagation codes in order to obtain optimum communication effectiveness.

20 Distribution Availability of Abstract	21 Abstract Security Classification	
☒ unclassified unlimited ☐ same as report ☐ DTIC users	Unclassified	
22a Name of Responsible Individual Richard W. Adler	22b Telephone (*include Area code*) (408) 646-2352	22c Office Symbol Code EC/Ab

DD FORM 1473,84 MAR 83 APR edition may be used until exhausted
All other editions are obsolete

security classification of this page

Unclassified

Approved for public release; distribution is unlimited.

Tactical HF Field Expedient Antenna Performance Volume II

by

Gurkan Turkes
Lieutenant Junior Grade, Turkish Navy
B.S., Turkish Naval Academy, 1982

Submitted in partial fulfillment of the
requirements for the degree of

MASTER OF SCIENCE IN ELECTRICAL ENGINEERING

from the

NAVAL POSTGRADUATE SCHOOL
March 1990

Author: 

Gurkan Turkes

Approved by: 

Richard W. Adler, Thesis Advisor



Stephen Jauregui, Second Reader

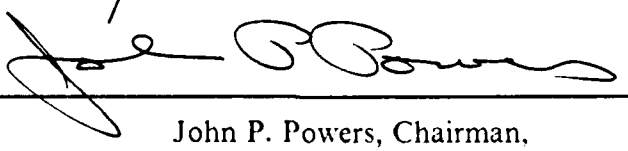

John P. Powers, Chairman,
Department of Electrical and Computer Engineering

ABSTRACT

This thesis investigates the performance of various configurations of tactical High Frequency (HF) field deployable antennas in the presence of lossy earth. Antennas investigated include horizontal dipoles, short sloping wires, inverted vees, and monopoles with buried and elevated radials. Numerical models of the antennas are exercised via the Numerical Electromagnetics Code (NEC) for radiation pattern performance. Antennas are analyzed for applicability to (1) short-range Near Vertical Incident Skywave (NVIS), where high elevation radiation angles are required, (2) medium- and long-range low radiation angle use, and (3) vertically polarized low-angle radiation for ground wave communication. Good NVIS and ground wave performance occurs for horizontal dipoles. Sloping wires and sloping dipoles are similar to horizontal dipoles but exhibit a moderate amount of azimuth plane directivity. Vertical monopoles with at least 15 buried radials produce medium- and long-range skywave coverage and good ground wave performance. Four elevated radials for quarter-wavelength monopoles are shown to out-perform 15 buried radials and are much easier to erect. The larger and more difficult-to-erect inverted vee dipole slightly outperforms a monopole by virtue of modest azimuth plane directivity.

The results of this study can be included in an antenna engineering handbook and can be used to interface with existing ionospheric propagation codes in order to obtain optimum communication effectiveness.

TABLE OF CONTENTS

A. APPENDIX C.

1. Introduction

The Numerical Electromagnetics Code (NEC) input data sets are included for all configurations of the antennas at frequencies of 3.8, 7.2, 14.2, 21.3, and 28.5 MHz over fair (average) ground, with relative permittivity of 10 and conductivity of 0.003 mhos/m. The first two RP cards produce field strengths at one mile for handbook use. The remaining RP cards provide azimuth plane radiation patterns for every ten degrees of take-off angle.

2. NEC input data sets

```
CM HALF WAVELENGTH HORIZONTAL DIPOLE
CM H = 7.62M = 25'
CM FR=3.8 MHZ
CM GROUND=0  EPSILON=10  SIGMA=.003
CE
GW 1,31, 0,19.7368,7.62, 0,-19.7368,7.62, .010265
GE 0
FR 0,0,0,0,3.8
GN 2,0,0,0,10,.003
EX 0,1,16,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM HALF WAVELENGTH HORIZONTAL DIPOLE
CM H = 10.668M = 35'
CM FR=3.8 MHZ
CM GROUND=0  EPSILON=10  SIGMA=.003
CE
GW 1,31, 0,19.7368,10.668, 0,-19.7368,10.668, .010265
GE 0
FR 0,0,0,0,3.8
GN 2,0,0,0,10,.003
EX 0,1,16,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
```

```
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM HALF WAVELENGTH HORIZONTAL DIPOLE
CM H = 15.24M = 50'
CM FR=3.8 MHZ
CM GROUND=0  EPSILON=10  SIGMA=.003
CE
GW 1,31, 0,19.7368,15.24, 0,-19.7368,15.24, .010265
GE 0
FR 0,0,0,0,3.8
GN 2,0,0,0,10,.003
EX 0,1,16,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM HALF WAVELENGTH HORIZONTAL DIPOLE
CM H = 27.432M = 90'
CM FR=3.8 MHZ
CM GROUND=0  EPSILON=10  SIGMA=.003
CE
GW 1,31, 0,19.7368,27.432, 0,-19.7368,27.432, .010265
GE 0
FR 0,0,0,0,3.8
GN 2,0,0,0,10,.003
EX 0,1,16,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
```

```
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN

CM HALF WAVELENGTH HORIZONTAL DIPOLE
CM H = 36.576 = 120'
CM FR=3.8 MHZ
CM GROUND=0  EPSILON=10  SIGMA=.003
CE
GW 1,31, 0,19.7368,36.576, 0,-19.7368,36.576, .010265
GE 0
FR 0,0,0,0,3.8
GN 2,0,0,0,10,.003
EX 0,1,16,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN

CM HALF WAVELENGTH HORIZONTAL DIPOLE
CM H = 7.62M = 25'
CM FR=7.2 MHZ
CM GROUND=0  EPSILON=10  SIGMA=.003
CE
GW 1,31, 0,10.41665,7.62, 0,-10.41665,7.62, .010265
GE 0
FR 0,0,0,0,7.2
GN 2,0,0,0,10,.003
EX 0,1,16,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
```

```
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM HALF WAVELENGTH HORIZONTAL DIPOLE
CM H = 10.668M = 35'
CM FR=7.2 MHZ
CM GROUND=0  EPSILON=10  SIGMA=.003
CE
GW 1,31, 0,10.41665,10.668, 0,-10.41665,10.668, .010265
GE 0
FR 0,0,0,0,7.2
GN 2,0,0,0,10,.003
EX 0,1,16,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM HALF WAVELENGTH HORIZONTAL DIPOLE
CM H = 15.24M = 50'
CM FR=7.2 MHZ
CM GROUND=0  EPSILON=10  SIGMA=.003
CE
GW 1,31, 0,10.41665,15.24, 0,-10.41665,15.24, .010265
GE 0
FR 0,0,0,0,7.2
GN 2,0,0,0,10,.003
EX 0,1,16,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
```

```
RP0,1,121,1500,0,0.0,0,3,0
EN


CM HALF WAVELENGTH HORIZONTAL DIPOLE
CM H = 27.432M = 90'
CM FR=7.2 MHZ
CM GROUND=0  EPSILON=10  SIGMA=.003
CE
GW 1,31, 0,10.41665,27.432, 0,-10.41665,27.432, .010265
GE 0
FR 0,0,0,0,7.2
GN 2,0,0,0,10,.003
EX 0,1,16,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM HALF WAVELENGTH HORIZONTAL DIPOLE
CM H = 36.576 = 120'
CM FR=7.2 MHZ
CM GROUND=0  EPSILON=10  SIGMA=.003
CE
GW 1,31, 0,10.41665,36.576, 0,-10.41665,36.576, .010265
GE 0
FR 0,0,0,0,7.2
GN 2,0,0,0,10,.003
EX 0,1,16,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN
```

```
CM HALF WAVELENGTH HORIZONTAL DIPOLE
CM H = 7.62M = 25'
CM FR=14.2 MHZ
CM GROUND=0  EPSILON=10  SIGMA=.003
CE
GW 1,31, 0,5.2816,7.62, 0,-5.2816,7.62, .010265
GE 0
FR 0,0,0,0,14.2
GN 2,0,0,0,10,.003
EX 0,1,16,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN
```

```
CM HALF WAVELENGTH HORIZONTAL DIPOLE
CM H = 10.668M=35'
CM FR=14.2 MHZ
CM GROUND=0  EPSILON=10  SIGMA=.003
CE
GW 1,31, 0,5.2816,10.668, 0,-5.2816,10.668, .010265
GE 0
FR 0,0,0,0,14.2
GN 2,0,0,0,10,.003
EX 0,1,16,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN
```

```
CM HALF WAVELENGTH HORIZONTAL DIPOLE
CM H = 15.24M=50'
CM FR=14.2 MHZ
CM GROUND=0  EPSILON=10  SIGMA=.003
CE
GW 1,31, 0,5.2816,15.24, 0,-5.2816,15.24, .010265
GE 0
FR 0,0,0,0,14.2
GN 2,0,0,0,10,.003
EX 0,1,16,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM HALF WAVELENGTH HORIZONTAL DIPOLE
CM H = 27.432M=90'
CM FR=14.2 MHZ
CM GROUND=0  EPSILON=10  SIGMA=.003
CE
GW 1,31, 0,5.2816,27.432, 0,-5.2816,27.432, .010265
GE 0
FR 0,0,0,0,14.2
GN 2,0,0,0,10,.003
EX 0,1,16,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM HALF WAVELENGTH HORIZONTAL DIPOLE
CM H = 36.576M=120'
CM FR=14.2 MHZ
```

```
CM GROUND=0  EPSILON=10  SIGMA=.003
CE
GW 1,31, 0,5.2816,36.576, 0,-5.2816,36.576, .010265
GE 0
FR 0,0,0,0,14.2
GN 2,0,0,0,10,.003
EX 0,1,16,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM HALF WAVELENGTH HORIZONTAL DIPOLE
CM H = 7.62M=25'
CM FR=21.3 MHZ
CM GROUND=0  EPSILON=10  SIGMA=.003
CE
GW 1,31, 0,3.5211,7.62, 0,-3.5211,7.62, .010265
GE 0
FR 0,0,0,0,21.3
GN 2,0,0,0,10,.003
EX 0,1,16,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM HALF WAVELENGTH HORIZONTAL DIPOLE
CM H = 10.668M=35'
CM FR=21.3 MHZ
CM GROUND=0  EPSILON=10  SIGMA=.003
CE
GW 1,31, 0,3.5211,10.668, 0,-3.5211,10.668, .010265
```

```
GE 0
FR 0,0,0,0,21.3
GN 2,0,0,0,10,.003
EX 0,1,16,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM HALF WAVELENGTH HORIZONTAL DIPOLE
CM H = 15.24M=50'
CM FR=21.3 MHZ
CM GROUND=0  EPSILON=10  SIGMA=.003
CE
GW 1,31, 0,3.5211,15.24, 0,-3.5211,15.24, .010265
GE 0
FR 0,0,0,0,21.3
GN 2,0,0,0,10,.003
EX 0,1,16,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM HALF WAVELENGTH HORIZONTAL DIPOLE
CM H = 27.432M=90'
CM FR=21.3 MHZ
CM GROUND=0  EPSILON=10  SIGMA=.003
CE
GW 1,31, 0,3.5211,27.432, 0,-3.5211,27.432, .010265
GE 0
FR 0,0,0,0,21.3
GN 2,0,0,0,10,.003
```

```
EX 0,1,16,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM HALF WAVELENGTH HORIZONTAL DIPOLE
CM H = 36.576M=120'
CM FR=21.3 MHZ
CM GROUND=0  EPSILON=10  SIGMA=.003
CE
GW 1,31, 0,3.5211,36.576, 0,-3.5211,36.576, .010265
GE 0
FR 0,0,0,0,21.3
GN 2,0,0,0,10,.003
EX 0,1,16,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM HALF WAVELENGTH HORIZONTAL DIPOLE
CM H = 7.62M=25'
CM FR=28.5 MHZ
CM GROUND=0  EPSILON=10  SIGMA=.003
CE
GW 1,31, 0,2.6315,7.62, 0,-2.6315,7.62, .010265
GE 0
FR 0,0,0,0,28.5
GN 2,0,0,0,10,.003
EX 0,1,16,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
```

```
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM HALF WAVELENGTH HORIZONTAL DIPOLE
CM H = 10.668M=35'
CM FR=28.5 MHZ
CM GROUND=0  EPSILON=10  SIGMA=.003
CE
GW 1,31, 0,2.6315,10.668, 0,-2.6315,10.668, .010265
GE 0
FR 0,0,0,0,28.5
GN 2,0,0,0,10,.003
EX 0,1,16,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM HALF WAVELENGTH HORIZONTAL DIPOLE
CM H = 15.24M=50'
CM FR=28.5 MHZ
CM GROUND=0  EPSILON=10  SIGMA=.003
CE
GW 1,31, 0,2.6315,15.24, 0,-2.6315,15.24, .010265
GE 0
FR 0,0,0,0,28.5
GN 2,0,0,0,10,.003
EX 0,1,16,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
```

```
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM HALF WAVELENGTH HORIZONTAL DIPOLE
CM H = 27.432M=90'
CM FR=28.5 MHZ
CM GROUND=0  EPSILON=10  SIGMA=.003
CE
GW 1,31, 0,2.6315,27.432, 0,-2.6315,27.432, .010265
GE 0
FR 0,0,0,0,28.5
GN 2,0,0,0,10,.003
EX 0,1,16,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM HALF WAVELENGTH HORIZONTAL DIPOLE
CM H = 36.576M=120'
CM FR=28.5 MHZ
CM GROUND=0  EPSILON=10  SIGMA=.003
CE
GW 1,31, 0,2.6315,36.576, 0,-2.6315,36.576, .010265
GE 0
FR 0,0,0,0,28.5
GN 2,0,0,0,10,.003
EX 0,1,16,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
```

```
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY   :  QUARTER-WAVELENGTH SLOPING WIRE
CM               CONNECTED TOWER WITH 4' GROUND ROD
CM               HEIGHT FROM TOP = 50' = 15.24M
CM               TOP ANGLE=45
CM FREQUENCY  :  3.8 MHZ
CM               WAVELENGTH FOR SKYWAVES     = 78.9473M
CM               WAVELENGTH FOR GROUND WAVES = 18.939M
CM WIRE       :  #12 ( R = .010265M )
CM GROUND (0) :  EPSILON = 10   ,  SIGMA = .003
CE
GW 1,10, 0,0,15.24, 0,13.956,1.284, .010265
GW 2,10, 0,0,15.24, 0,0,0, .010265
GW 3,2, 0,0,0, 0,0,-1.2192, .010265
GE 0
FR 0,0,0,0,3.8
GN 2,0,0,0,10,.003
EX 0,1,1,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY   :  QUARTER-WAVELENGTH SLOPING WIRE
CM               CONNECTED TOWER WITH 4' GROUND ROD
CM               HEIGHT FROM TOP = 90' = 27.432M
CM               TOP ANGLE=45
CM FREQUENCY  :  3.8 MHZ
CM               WAVELENGTH FOR SKYWAVES     = 78.9473M
CM               WAVELENGTH FOR GROUND WAVES = 18.939M
CM WIRE       :  #12 ( R = .010265M )
CM GROUND (0) :  EPSILON = 10   ,  SIGMA = .003
CE
GW 1,10, 0,0,27.432, 0,13.956,13.476, .010265
GW 2,10, 0,0,27.432, 0,0,0, .010265
GW 3,2, 0,0,0, 0,0,-1.2192, .010265
GE 0
```

```
FR 0,0,0,0,3.8
GN 2,0,0,0,10,.003
EX 0,1,1,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY   :  QUARTER-WAVELENGTH SLOPING WIRE
CM               CONNECTED TOWER WITH 4' GROUND ROD
CM               HEIGHT FROM TOP = 50' = 15.24M
CM               TOP ANGLE=40 FEED AT TOP
CM FREQUENCY  :  3.8 MHZ
CM               WAVELENGTH FOR SKYWAVES     = 78.9473M
CM               WAVELENGTH FOR GROUND WAVES = 18.939M
CM WIRE       :  #12 ( R = .010265M )
CM GROUND (0) :  EPSILON = 10   ,  SIGMA = .003
CE
GW 1,10, 0,0,15.24, 0,12.6866,.1209, .010265
GW 2,10, 0,0,15.24, 0,0,0, .010265
GW 3,2, 0,0,0, 0,0,-1.2192, .010265
GE 0
FR 0,0,0,0,3.8
GN 2,0,0,0,10,.003
EX 0,1,1,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY   :  QUARTER-WAVELENGTH SLOPING WIRE
CM               CONNECTED TOWER WITH 4' GROUND ROD
CM               HEIGHT FROM TOP = 90' = 27.432M
```

```
CM                TOP ANGLE=30  FEED AT TOP
CM FREQUENCY  :   3.8 MHZ
CM                WAVELENGTH FOR SKYWAVES     = 78.9473M
CM                WAVELENGTH FOR GROUND WAVES = 18.939M
CM WIRE       :   #12 ( R = .010265M )
CM GROUND (0) :   EPSILON = 10   ,  SIGMA = .003
CE
GW 1,10, 0,0,27.432, 0,9.8684,10.3395, .010265
GW 2,10, 0,0,27.432, 0,0,0, .010265
GW 3,2, 0,0,0, 0,0,-1.2192, .010265
GE 0
FR 0,0,0,0,3.8
GN 2,0,0,0,10,.003
EX 0,1,1,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY   :   QUARTER-WAVELENGTH SLOPING WIRE
CM                CONNECTED TOWER WITH 4' GROUND ROD
CM                HEIGHT FROM TOP = 50' = 15.24M
CM                TOP ANGLE=45  FEED AT TOP
CM FREQUENCY  :   7.2 MHZ
CM                WAVELENGTH FOR SKYWAVES     = 41.66M
CM                WAVELENGTH FOR GROUND WAVES = 11.785M
CM WIRE       :   #12 ( R = .010265M )
CM GROUND (0) :   EPSILON = 10   ,  SIGMA = .003
CE
GW 1,10, 0,0,15.24, 0,7.3645,7.8755, .010265
GW 2,10, 0,0,15.24, 0,0,0, .010265
GW 3,2, 0,0,0, 0,0,-1.2192, .010265
GE 0
FR 0,0,0,0,7.2
GN 2,0,0,0,10,.003
EX 0,1,1,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
```

```
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY   :  QUARTER-WAVELENGTH SLOPING WIRE
CM               CONNECTED TOWER WITH 4' GROUND ROD
CM               HEIGHT FROM TOP = 90' = 27.432M
CM               TOP ANGLE=45  FEED AT TOP
CM FREQUENCY  :  7.2 MHZ
CM               WAVELENGTH FOR SKYWAVES     = 41.66M
CM               WAVELENGTH FOR GROUND WAVES = 11.785M
CM WIRE       :  #12 ( R = .010265M )
CM GROUND (0) :  EPSILON = 10   ,  SIGMA = .003
CE
GW 1,10, 0,0,27.432, 0,7.3645,20.0675, .010265
GW 2,10, 0,0,27.432, 0,0,0, .010265
GW 3,2, 0,0,0, 0,0,-1.2192, .010265
GE 0
FR 0,0,0,0,7.2
GN 2,0,0,0,10,.003
EX 0,1,1,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY   :  QUARTER-WAVELENGTH SLOPING WIRE
CM               CONNECTED TOWER WITH 4' GROUND ROD
CM               HEIGHT FROM TOP = 50' = 15.24M
CM               TOP ANGLE=30 FEED AT TOP
CM FREQUENCY  :  7.2 MHZ
CM               WAVELENGTH FOR SKYWAVES     = 41.66M
CM               WAVELENGTH FOR GROUND WAVES = 11.785M
CM WIRE       :  #12 ( R = .010265M )
CM GROUND (0) :  EPSILON = 10   ,  SIGMA = .003
CE
GW 1,10, 0,0,15.24, 0,5.2075,6.2203, .010265
GW 2,10, 0,0,15.24, 0,0,0, .010265
GW 3,2, 0,0,0, 0,0,-1.2192, .010265
GE 0
FR 0,0,0,0,7.2
```

```
GN 2,0,0,0,10,.003
EX 0,1,1,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY   :  QUARTER-WAVELENGTH SLOPING WIRE
CM               CONNECTED TOWER WITH 4' GROUND ROD
CM               HEIGHT FROM TOP = 90' = 27.432M
CM               TOP ANGLE=30  FEED AT TOP
CM FREQUENCY  :  7.2 MHZ
CM               WAVELENGTH FOR SKYWAVES     = 41.66M
CM               WAVELENGTH FOR GROUND WAVES = 11.785M
CM WIRE       :  #12 ( R = .010265M )
CM GROUND (0) :  EPSILON = 10  ,  SIGMA = .003
CE
GW 1,10, 0,0,27.432, 0,5.2075,18.4123, .010265
GW 2,10, 0,0,27.432, 0,0,0, .010265
GW 3,2, 0,0,0, 0,0,-1.2192, .010265
GE 0
FR 0,0,0,0,7.2
GN 2,0,0,0,10,.003
EX 0,1,1,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY   :  QUARTER-WAVELENGTH SLOPING WIRE
CM               CONNECTED TOWER WITH 4' GROUND ROD
CM               HEIGHT FROM TOP = 50' = 15.24M
CM               TOP ANGLE=45 FEED AT TOP
```

```
CM FREQUENCY  :  14.2 MHZ
CM               WAVELENGTH FOR SKYWAVES     = 21.1268M
CM               WAVELENGTH FOR GROUND WAVES = 6.459M
CM WIRE       :  #12 ( R = .010265M )
CM GROUND (0) :  EPSILON = 10  ,  SIGMA = .003
CE
GW 1,10, 0,0,15.24, 0,3.7347,11.5053, .010265
GW 2,10, 0,0,15.24, 0,0,0, .010265
GW 3,3, 0,0,0, 0,0,-1.2192, .010265
GE 0
FR 0,0,0,0,14.2
GN 2,0,0,0,10,.003
EX 0,1,1,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN
```

```
CM GEOMETRY   :  QUARTER-WAVELENGTH SLOPING WIRE
CM               CONNECTED TOWER WITH 4' GROUND ROD
CM               HEIGHT FROM TOP = 90' = 27.432M
CM               TOP ANGLE=45  FEED AT TOP
CM FREQUENCY  :  14.2 MHZ
CM               WAVELENGTH FOR SKYWAVES     = 21.1268M
CM               WAVELENGTH FOR GROUND WAVES = 6.459M
CM WIRE       :  #12 ( R = .010265M )
CM GROUND (0) :  EPSILON = 10  ,  SIGMA = .003
CE
GW 1,10, 0,0,27.432, 0,3.7347,23.6973, .010265
GW 2,15, 0,0,27.432, 0,0,0, .010265
GW 3,3, 0,0,0, 0,0,-1.2192, .010265
GE 0
FR 0,0,0,0,14.2
GN 2,0,0,0,10,.003
EX 0,1,1,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
```

```
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY   :  QUARTER-WAVELENGTH SLOPING WIRE
CM               CONNECTED TOWER WITH 4' GROUND ROD
CM               HEIGHT FROM TOP = 50' = 15.24M
CM               TOP ANGLE=30 FEED AT TOP
CM FREQUENCY  :  14.2 MHZ
CM               WAVELENGTH FOR SKYWAVES      = 21.1268M
CM               WAVELENGTH FOR GROUND WAVES = 6.459M
CM WIRE       :  #12 ( R = .010265M )
CM GROUND (0) :  EPSILON = 10   ,  SIGMA = .003
CE
GW 1,10, 0,0,15.24, 0,2.6409,10.6659, .010265
GW 2,10, 0,0,15.24, 0,0,0, .010265
GW 3,3, 0,0,0, 0,0,-1.2192, .010265
GE 0
FR 0,0,0,0,14.2
GN 2,0,0,0,10,.003
EX 0,1,1,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY   :  QUARTER-WAVELENGTH SLOPING WIRE
CM               CONNECTED TOWER WITH 4' GROUND ROD
CM               HEIGHT FROM TOP = 90' = 27.432M
CM               TOP ANGLE=30  FEED AT TOP
CM FREQUENCY  :  14.2 MHZ
CM               WAVELENGTH FOR SKYWAVES      = 21.1268M
CM               WAVELENGTH FOR GROUND WAVES = 6.459M
CM WIRE       :  #12 ( R = .010265M )
CM GROUND (0) :  EPSILON = 10   ,  SIGMA = .003
CE
GW 1,10, 0,0,27.432, 0,2.6409,22.8579, .010265
GW 2,15, 0,0,27.432, 0,0,0, .010265
GW 3,3, 0,0,0, 0,0,-1.2192, .010265
GE 0
FR 0,0,0,0,14.2
GN 2,0,0,0,10,.003
```

```
EX 0,1,1,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY   :  QUARTER-WAVELENGTH SLOPING WIRE
CM               CONNECTED TOWER WITH 4' GROUND ROD
CM               HEIGHT FROM TOP = 50' = 15.24M
CM               TOP ANGLE=45 FEED AT TOP
CM FREQUENCY  :  21.3 MHZ
CM               WAVELENGTH FOR SKYWAVES      = 14.0845M
CM               WAVELENGTH FOR GROUND WAVES = 4.385M
CM WIRE       :  #12 ( R = .010265M )
CM GROUND (0) :  EPSILON = 10   ,  SIGMA = .003
CE
GW 1,10, 0,0,15.24, 0,2.4898,12.7502, .010265
GW 2,15, 0,0,15.24, 0,0,0, .010265
GW 3,4, 0,0,0, 0,0,-1.2192, .010265
GE 0
FR 0,0,0,0,21.3
GN 2,0,0,0,10,.003
EX 0,1,1,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY   :  QUARTER-WAVELENGTH SLOPING WIRE
CM               CONNECTED TOWER WITH 4' GROUND ROD
CM               HEIGHT FROM TOP = 90' = 27.432M
CM               TOP ANGLE=45  FEED AT TOP
CM FREQUENCY  :  21.3 MHZ
```

```
CM                WAVELENGTH FOR SKYWAVES      = 14.0845M
CM                WAVELENGTH FOR GROUND WAVES = 4.385M
CM WIRE         :  #12 ( R = .010265M )
CM GROUND (0) :  EPSILON = 10   ,  SIGMA = .003
CE
GW 1,10, 0,0,27.432, 0,2.4898,24.9422, .010265
GW 2,25, 0,0,27.432, 0,0,0, .010265
GW 3,4, 0,0,0, 0,0,-1.2192, .010265
GE 0
FR 0,0,0,0,21.3
GN 2,0,0,0,10,.003
EX 0,1,1,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN
```

```
CM GEOMETRY    :  QUARTER-WAVELENGTH SLOPING WIRE
CM                CONNECTED TOWER WITH 4' GROUND ROD
CM                HEIGHT FROM TOP = 50' = 15.24M
CM                TOP ANGLE=30 FEED AT TOP
CM FREQUENCY   :  21.3 MHZ
CM                WAVELENGTH FOR SKYWAVES      = 14.0845M
CM                WAVELENGTH FOR GROUND WAVES = 4.385M
CM WIRE         :  #12 ( R = .010265M )
CM GROUND (0) :  EPSILON = 10   ,  SIGMA = .003
CE
GW 1,10, 0,0,15.24, 0,1.7606,12.1906, .010265
GW 2,15, 0,0,15.24, 0,0,0, .010265
GW 3,4, 0,0,0, 0,0,-1.2192, .010265
GE 0
FR 0,0,0,0,21.3
GN 2,0,0,0,10,.003
EX 0,1,1,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
```

```
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY   :  QUARTER-WAVELENGTH SLOPING WIRE
CM               CONNECTED TOWER WITH 4' GROUND ROD
CM               HEIGHT FROM TOP = 90' = 27.432M
CM               TOP ANGLE=30  FEED AT TOP
CM FREQUENCY  :  21.3 MHZ
CM               WAVELENGTH FOR SKYWAVES     = 14.0845M
CM               WAVELENGTH FOR GROUND WAVES = 4.385M
CM WIRE       :  #12 ( R = .010265M )
CM GROUND (0) :  EPSILON = 10   ,  SIGMA = .003
CE
GW 1,10, 0,0,27.432, 0,1.7606,24.3826, .010265
GW 2,25, 0,0,27.432, 0,0,0, .010265
GW 3,4, 0,0,0, 0,0,-1.2192, .010265
GE 0
FR 0,0,0,0,21.3
GN 2,0,0,0,10,.003
EX 0,1,1,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY   :  QUARTER-WAVELENGTH SLOPING WIRE
CM               CONNECTED TOWER WITH 4' GROUND ROD
CM               HEIGHT FROM TOP = 50' = 15.24M
CM               TOP ANGLE=45 FEED AT TOP
CM FREQUENCY  :  28.5 MHZ
CM               WAVELENGTH FOR SKYWAVES     = 10.5263M
CM               WAVELENGTH FOR GROUND WAVES = 3.299M
CM WIRE       :  #12 ( R = .010265M )
CM GROUND (0) :  EPSILON = 10   ,  SIGMA = .003
CE
GW 1,10, 0,0,15.24, 0,1.8608,13.3792, .010265
GW 2,20, 0,0,15.24, 0,0,0, .010265
GW 3,5, 0,0,0, 0,0,-1.2192, .010265
GE 0
FR 0,0,0,0,28.5
GN 2,0,0,0,10,.003
EX 0,1,1,01,1,0
```

```
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY   :  QUARTER-WAVELENGTH SLOPING WIRE
CM               CONNECTED TOWER WITH 4' GROUND ROD
CM               HEIGHT FROM TOP = 90' = 27.432M
CM               TOP ANGLE=45  FEED AT TOP
CM FREQUENCY  :  28.5 MHZ
CM               WAVELENGTH FOR SKYWAVES     = 10.5263M
CM               WAVELENGTH FOR GROUND WAVES = 3.299M
CM WIRE       :  #12 ( R = .010265M )
CM GROUND (0) :  EPSILON = 10   ,  SIGMA = .003
CE
GW 1,10, 0,0,27.432, 0,1.8608,25.5712, .010265
GW 2,35, 0,0,27.432, 0,0,0, .010265
GW 3,5, 0,0,0, 0,0,-1.2192, .010265
GE 0
FR 0,0,0,0,28.5
GN 2,0,0,0,10,.003
EX 0,1,1,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1 121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY   :  QUARTER-WAVELENGTH SLOPING WIRE
CM               CONNECTED TOWER WITH 4' GROUND ROD
CM               HEIGHT FROM TOP = 50' = 15.24M
CM               TOP ANGLE=30 FEED AT TOP
CM FREQUENCY  :  28.5 MHZ
CM               WAVELENGTH FOR SKYWAVES     = 10.5263M
```

```
CM                WAVELENGTH FOR GROUND WAVES = 3.299M
CM WIRE        :  #12 ( R = .010265M )
CM GROUND (0) :   EPSILON = 10   ,   SIGMA = .003
CE
GW 1,10, 0,0,15.24, 0,1.3158,12.9610, .010265
GW 2,20, 0,0,15.24, 0,0,0, .010265
GW 3,5, 0,0,0, 0,0,-1.2192, .010265
GE 0
FR 0,0,0,0,28.5
GN 2,0,0,0,10,.003
EX 0,1,1,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY    :  QUARTER-WAVELENGTH SLOPING WIRE
CM                CONNECTED TOWER WITH 4' GROUND ROD
CM                HEIGHT FROM TOP = 90' = 27.432M
CM                TOP ANGLE=30  FEED AT TOP
CM FREQUENCY   :  28.5 MHZ
CM                WAVELENGTH FOR SKYWAVES      = 10.5263M
CM                WAVELENGTH FOR GROUND WAVES = 3.299M
CM WIRE        :  #12 ( R = .010265M )
CM GROUND (0) :   EPSILON = 10   ,   SIGMA = .003
CE
GW 1,10, 0,0,27.432, 0,1.3158,25.1530, .010265
GW 2,35, 0,0,27.432, 0,0,0, .010265
GW 3,5, 0,0,0, 0,0,-1.2192, .010265
GE 0
FR 0,0,0,0,28.5
GN 2,0,0,0,10,.003
EX 0,1,1,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
```

```
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY   :  HALF-WAVELENGTH SLOPING DIPOLE
CM               DETACHED TOWER WITH 4' GROUND ROD
CM               HEIGHT FROM TOP = 50' = 15.24M
CM               TOP ANGLE=70
CM FREQUENCY  :  3.8 MHZ
CM               WAVELENGTH FOR SKYWAVES     = 78.9473M
CM               WAVELENGTH FOR GROUND WAVES = 18.939M
CM WIRE       :  #12 ( R = .010265M )
CM GROUND (0) :  EPSILON = 10  ,  SIGMA = .003
CE
GW 1,11, 0,.1,15.24, 0,37.193,1.74, .010265
GW 2,10, 0,0,15.24, 0,0,0, .010265
GW 3,2, 0,0,0, 0,0,-1.2192, .010265
GE 0
FR 0,0,0,0,3.8
GN 2,0,0,0,10,.003
EX 0,1,6,01,1,0
PL 3,1,0,4
RP 0,181,1,1000,-90,90,1,0
EN


CM GEOMETRY   :  HALF-WAVELENGTH SLOPING DIPOLE
CM               DETACHED TOWER WITH 4' GROUND ROD
CM               HEIGHT FROM TOP = 90' = 27.432M
CM               TOP ANGLE=50
CM FREQUENCY  :  3.8 MHZ
CM               WAVELENGTH FOR SKYWAVES     = 78.9473M
CM               WAVELENGTH FOR GROUND WAVES = 18.939M
CM WIRE       :  #12 ( R = .010265M )
CM GROUND (0) :  EPSILON = 10  ,  SIGMA = .003
CE
GW 1,11, 0,.01,27.432, 0,30.2485,2.0589, .010265
GW 2,10, 0,0,27.432, 0,0,0, .010265
GW 3,2, 0,0,0, 0,0,-1.2192, .010265
GE 0
FR 0,0,0,0,3.8
GN 2,0,0,0,10,.003
EX 0,1,6,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
```

```
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY   :  HALF-WAVELENGTH SLOPING DIPOLE
CM               DETACHED TOWER WITH 4' GROUND ROD
CM               HEIGHT FROM TOP = 90' = 27.432M
CM               TOP ANGLE=30  CENTER FEED
CM FREQUENCY  :  7.2 MHZ
CM               WAVELENGTH FOR SKYWAVES     = 41.66M
CM               WAVELENGTH FOR GROUND WAVES = 11.785M
CM WIRE       :  #12 ( R = .010265M )
CM GROUND (0) :  EPSILON = 10  ,  SIGMA = .003
CE
GW 1,11, 0,.01,27.432, 0,10.425,9.3927, .010265
GW 2,10, 0,0,27.432, 0,0,0, .010265
GW 3,2, 0,0,0, 0,0,-1.2192, .010265
GE 0
FR 0,0,0,0,7.2
GN 2,0,0,0,10,.003
EX 0,1,6,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY   :  HALF-WAVELENGTH SLOPING DIPOLE
CM               DETACHED TOWER WITH 4' GROUND ROD
CM               HEIGHT FROM TOP = 50' = 15.24M
CM               TOP ANGLE=45   CENTER FEED
CM FREQUENCY  :  7.2 MHZ
CM               WAVELENGTH FOR SKYWAVES     = 41.66M
CM               WAVELENGTH FOR GROUND WAVES = 11.785M
CM WIRE       :  #12 ( R = .010265M )
CM GROUND (0) :  EPSILON = 10  ,  SIGMA = .003
CE
GW 1,11, 0,.01,15.24, 0,14.739,.511, .010265
GW 2,10, 0,0,15.24, 0,0,0, .010265
GW 3,2, 0,0,0, 0,0,-1.2192, .010265
GE 0
FR 0,0,0,0,7.2
GN 2,0,0,0,10,.003
EX 0,1,6,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
```

```
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY   :  HALF-WAVELENGTH SLOPING DIPOLE
CM               DETACHED TOWER WITH 4' GROUND ROD
CM               HEIGHT FROM TOP = 90' = 27.432M
CM               TOP ANGLE=45  CENTER FEED
CM FREQUENCY  :  7.2 MHZ
CM               WAVELENGTH FOR SKYWAVES     = 41.66M
CM               WAVELENGTH FOR GROUND WAVES = 11.785M
CM WIRE       :  #12 ( R = .010265M )
CM GROUND (0) :  EPSILON = 10   ,  SIGMA = .003
CE
GW 1,11, 0,.01,27.432, 0,14.739,12.703, .010265
GW 2,10, 0,0,27.432, 0,0,0, .010265
GW 3,2, 0,0,0, 0,0,-1.2192, .010265
GE 0
FR 0,0,0,0,7.2
GN 2,0,0,0,10,.003
EX 0,1,6,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY   :  HALF-WAVELENGTH SLOPING DIPOLE
CM               DETACHED TOWER WITH 4' GROUND ROD
CM               HEIGHT FROM TOP = 50' = 15.24M
CM               TOP ANGLE=30
CM FREQUENCY  :  14.2 MHZ
CM               WAVELENGTH FOR SKYWAVES     = 21.1268M
CM               WAVELENGTH FOR GROUND WAVES = 6.459M
CM WIRE       :  #12 ( R = .010265M )
```

```
CM GROUND (0) :  EPSILON = 10  ,  SIGMA = .003
CE
GW 1,11, 0,.01,15.24, 0,5.2917,6.0918, .010265
GW 2,10, 0,0,15.24, 0,0,0, .010265
GW 3,3, 0,0,0, 0,0,-1.2192, .010265
GE 0
FR 0,0,0,0,14.2
GN 2,0,0,0,10,.003
EX 0,1,6,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN
```

```
CM GEOMETRY   :  HALF-WAVELENGTH SLOPING DIPOLE
CM               DETACHED TOWER WITH 4' GROUND ROD
CM               HEIGHT FROM TOP = 90' = 27.432M
CM               TOP ANGLE=30
CM FREQUENCY  :  14.2 MHZ
CM               WAVELENGTH FOR SKYWAVES     = 21.1268M
CM               WAVELENGTH FOR GROUND WAVES = 6.459M
CM WIRE       :  #12 ( R = .010265M )
CM GROUND (0) :  EPSILON = 10  ,  SIGMA = .003
CE
GW 1,11, 0,.01,27.432, 0,5.2917,18.2838, .010265
GW 2,10, 0,0,27.432, 0,0,0, .010265
GW 3,3, 0,0,0, 0,0,-1.2192, .010265
GE 0
FR 0,0,0,0,14.2
GN 2,0,0,0,10,.003
EX 0,1,6,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
```

```
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY   :  HALF-WAVELENGTH SLOPING DIPOLE
CM               DETACHED TOWER WITH 4' GROUND ROD
CM               HEIGHT FROM TOP = 50' = 15.24M
CM               TOP ANGLE=45
CM FREQUENCY  :  14.2 MHZ
CM               WAVELENGTH FOR SKYWAVES     = 21.1268M
CM               WAVELENGTH FOR GROUND WAVES = 6.459M
CM WIRE       :  #12 ( R = .010265M )
CM GROUND (0) :  EPSILON = 10  ,  SIGMA = .003
CE
GW 1,11, 0,.01,15.24, 0,7.4795,7.7705, .010265
GW 2,10, 0,0,15.24, 0,0,0, .010265
GW 3,3, 0,0,0, 0,0,-1.2192, .010265
GE 0
FR 0,0,0,0,14.2
GN 2,0,0,0,10,.003
EX 0,1,6,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY   :  HALF-WAVELENGTH SLOPING DIPOLE
CM               DETACHED TOWER WITH 4' GROUND ROD
CM               HEIGHT FROM TOP = 90' = 27.432M
CM               TOP ANGLE=45
CM FREQUENCY  :  14.2 MHZ
CM               WAVELENGTH FOR SKYWAVES     = 21.1268M
CM               WAVELENGTH FOR GROUND WAVES = 6.459M
CM WIRE       :  #12 ( R = .010265M )
CM GROUND (0) :  EPSILON = 10  ,  SIGMA = .003
CE
GW 1,11, 0,.01,27.432, 0,7.4795,19.9625, .010265
GW 2,15, 0,0,27.432, 0,0,0, .010265
GW 3,3, 0,0,0, 0,0,-1.2192, .010265
GE 0
FR 0,0,0,0,14.2
GN 2,0,0,0,10,.003
EX 0,1,6,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
```

```
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY   :  HALF-WAVELENGTH SLOPING DIPOLE
CM               DETACHED TOWER WITH 4' GROUND ROD
CM               HEIGHT FROM TOP = 50' = 15.24M
CM               TOP ANGLE=30
CM FREQUENCY  :  21.3 MHZ
CM               WAVELENGTH FOR SKYWAVES     = 14.0845M
CM               WAVELENGTH FOR GROUND WAVES = 4.385M
CM WIRE       :  #12 ( R = .010265M )
CM GROUND (0) :  EPSILON = 10   ,  SIGMA = .003
CE
GW 1,11, 0,.01,15.24, 0,3.5312,9.1412, .010265
GW 2,15, 0,0,15.24, 0,0,0, .010265
GW 3,4, 0,0,0, 0,0,-1.2192, .010265
GE 0
FR 0,0,0,0,21.3
GN 2,0,0,0,10,.003
EX 0,1,6,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY   :  HALF-WAVELENGTH SLOPING DIPOLE
CM               DETACHED TOWER WITH 4' GROUND ROD
CM               HEIGHT FROM TOP = 90' = 27.432M
CM               TOP ANGLE=30
CM FREQUENCY  :  21.3 MHZ
CM               WAVELENGTH FOR SKYWAVES     = 14.0845M
CM               WAVELENGTH FOR GROUND WAVES = 4.385M
CM WIRE       :  #12 ( R = .010265M )
```

```
CM GROUND (0) :  EPSILON = 10  ,  SIGMA = .003
CE
GW 1,11, 0,.01,27.432, 0,3.5312,21.3332, .010265
GW 2,15, 0,0,27.432, 0,0,0, .010265
GW 3,4, 0,0,0, 0,0,-1.2192, .010265
GE 0
FR 0,0,0,0,21.3
GN 2,0,0,0,10,.003
EX 0,1,6,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY   :  HALF-WAVELENGTH SLOPING DIPOLE
CM               DETACHED TOWER WITH 4' GROUND ROD
CM               HEIGHT FROM TOP = 50' = 15.24M
CM               TOP ANGLE=45
CM FREQUENCY  :  21.3 MHZ
CM               WAVELENGTH FOR SKYWAVES     = 14.0845M
CM               WAVELENGTH FOR GROUND WAVES = 4.385M
CM WIRE       :  #12 ( R = .010265M )
CM GROUND (0) :  EPSILON = 10  ,  SIGMA = .003
CE
GW 1,11, 0,.01,15.24, 0,4.9897,10.2603, .010265
GW 2,15, 0,0,15.24, 0,0,0, .010265
GW 3,4, 0,0,0, 0,0,-1.2192, .010265
GE 0
FR 0,0,0,0,21.3
GN 2,0,0,0,10,.003
EX 0,1,6,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
```

```
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY   :  HALF-WAVELENGTH SLOPING DIPOLE
CM               DETACHED TOWER WITH 4' GROUND ROD
CM               HEIGHT FROM TOP = 90' = 27.432M
CM               TOP ANGLE=45
CM FREQUENCY  :  21.3 MHZ
CM               WAVELENGTH FOR SKYWAVES     = 14.0845M
CM               WAVELENGTH FOR GROUND WAVES = 4.385M
CM WIRE       :  #12 ( R = .010265M )
CM GROUND (0) :  EPSILON = 10  ,  SIGMA = .003
CE
GW 1,11, 0,.01,27.432, 0,4.9897,22.4523, .010265
GW 2,25, 0,0,27.432, 0,0,0, .010265
GW 3,4, 0,0,0, 0,0,-1.2192, .010265
GE 0
FR 0,0,0,0,21.3
GN 2,0,0,0,10,.003
EX 0,1,6,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN
EN


CM GEOMETRY   :  HALF-WAVELENGTH SLOPING DIPOLE
CM               DETACHED TOWER WITH 4' GROUND ROD
CM               HEIGHT FROM TOP = 50' = 15.24M
CM               TOP ANGLE=30
CM FREQUENCY  :  28.5 MHZ
CM               WAVELENGTH FOR SKYWAVES     = 10.5263M
CM               WAVELENGTH FOR GROUND WAVES = 3.299M
CM WIRE       :  #12 ( R = .010265M )
CM GROUND (0) :  EPSILON = 10  ,  SIGMA = .003
CE
GW 1,11, 0,.01,15.24, 0,2.6416,10.6819, .010265
GW 2,20, 0,0,15.24, 0,0,0, .010265
GW 3,5, 0,0,0, 0,0,-1.2192, .010265
GE 0
FR 0,0,0,0,28.5
GN 2,0,0,0,10,.003
EX 0,1,6,01,1,0
PL3,2,1,0
```

```
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY   :  HALF-WAVELENGTH SLOPING DIPOLE
CM               DETACHED TOWER WITH 4' GROUND ROD
CM               HEIGHT FROM TOP = 90' = 27.432M
CM               TOP ANGLE=30
CM FREQUENCY  :  28.5 MHZ
CM               WAVELENGTH FOR SKYWAVES     = 10.5263M
CM               WAVELENGTH FOR GROUND WAVES = 3.299M
CM WIRE       :  #12 ( R = .010265M )
CM GROUND (0) :  EPSILON = 10  ,  SIGMA = .003
CE
GW 1,11, 0,.01,27.432, 0,2.6416,22.8739, .010265
GW 2,30, 0,0,27.432, 0,0,0, .010265
GW 3,5, 0,0,0, 0,0,-1.2192, .010265
GE 0
FR 0,0,0,0,28.5
GN 2,0,0,0,10,.003
EX 0,1,6,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY   :  HALF-WAVELENGTH SLOPING DIPOLE
CM               DETACHED TOWER WITH 4' GROUND ROD
CM               HEIGHT FROM TOP = 50' = 15.24M
CM               TOP ANGLE=45
CM FREQUENCY  :  28.5 MHZ
CM               WAVELENGTH FOR SKYWAVES     = 10.5263M
CM               WAVELENGTH FOR GROUND WAVES = 3.299M
```

```
CM WIRE       :  #12 ( R = .010265M )
CM GROUND (0) :  EPSILON = 10   ,  SIGMA = .003
CE
GW 1,11, 0,.01,15.24, 0,3.7316,11.5184, .010265
GW 2,20, 0,0,15.24, 0,0,0, .010265
GW 3,5, 0,0,0, 0,0,-1.2192, .010265
GE 0
FR 0,0,0,0,28.5
GN 2,0,0,0,10,.003
EX 0,1,6,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN
```

```
CM GEOMETRY   :  HALF-WAVELENGTH SLOPING DIPOLE
CM               DETACHED TOWER WITH 4' GROUND ROD
CM               HEIGHT FROM TOP = 90' = 27.432M
CM               TOP ANGLE=45
CM FREQUENCY  :  28.5 MHZ
CM               WAVELENGTH FOR SKYWAVES      = 10.5263M
CM               WAVELENGTH FOR GROUND WAVES = 3.299M
CM WIRE       :  #12 ( R = .010265M )
CM GROUND (0) :  EPSILON = 10   ,  SIGMA = .003
CE
GW 1,11, 0,.01,27.432, 0,3.7316,23.7104, .010265
GW 2,30, 0,0,27.432, 0,0,0, .010265
GW 3,5, 0,0,0, 0,0,-1.2192, .010265
GE 0
FR 0,0,0,0,28.5
GN 2,0,0,0,10,.003
EX 0,1,6,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
```

```
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY  : QUARTER WAVELENGTH MONOPOLE
CM             4 FEET GROUND ROD
CM FREQUENCY : 3.8MHZ
CM WIRE      : #12 ( RADIUS R=.010265M )
CM GROUND(0) : EPSILON = 10    SIGMA=.003
CE
GW 1,10, 0,0,0, 0,0,19.7368, .010265
GW 2,1, 0,0,0, 0,0,-1.2192, .010265
GE 0
FR 0,0,0,0,3.8
GN 2,0,0,0,10,.003
EX 0,1,1,01,1,0
EX 0,2,1,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY  : QUARTER WAVELENGTH MONOPOLE
CM             4 FEET GROUND ROD
CM FREQUENCY : 7.2MHZ
CM WIRE      : #12 ( RADIUS R=.010265M )
CM GROUND(0) : EPSILON = 10    SIGMA=.003
CE
GW 1,10, 0,0,0, 0,0,10.4166, .010265
GW 2,2, 0,0,0, 0,0,-1.2192, .010265
GE 0
FR 0,0,0,0,7.2
GN 2,0,0,0,10,.003
EX 0,1,1,01,1,0
EX 0,2,1,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
```

```
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY  : QUARTER WAVELENGTH MONOPOLE
CM             4 FEET GROUND ROD
CM FREQUENCY : 14.2MHZ
CM WIRE      : #12 ( RADIUS R=.010265M )
CM GROUND(0) : EPSILON = 10    SIGMA=.003
CE
GW 1,10, 0,0,0, 0,0,5.2816, .010265
GW 2,3, 0,0,0, 0,0,-1.2192, .010265
GE 0
FR 0,0,0,0,14.2
GN 2,0,0,0,10,.003
EX 0,1,1,01,1,0
EX 0,2,1,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY  : QUARTER WAVELENGTH MONOPOLE
CM             4 FEET GROUND ROD
CM FREQUENCY : 21.3MHZ
CM WIRE      : #12 ( RADIUS R=.010265M )
CM GROUND(0) : EPSILON = 10    SIGMA=.003
CE
GW 1,10, 0,0,0, 0,0,3.5211, .010265
GW 2,4, 0,0,0, 0,0,-1.2192, .010265
GE 0
FR 0,0,0,0,21.3
GN 2,0,0,0,10,.003
EX 0,1,1,01,1,0
EX 0,2,1,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
```

```
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY  : QUARTER WAVELENGTH MONOPOLE
CM             4 FEET GROUND ROD
CM FREQUENCY : 28.5MHZ
CM WIRE      : #12 ( RADIUS R=.010265M )
CM GROUND(0) : EPSILON = 10    SIGMA=.003
CE
GW 1,10, 0,0,0, 0,0,2.6315, .010265
GW 2,4, 0,0,0, 0,0,-1.2192, .010265
GE 0
FR 0,0,0,0,28.5
GN 2,0,0,0,10,.003
EX 0,1,1,01,1,0
EX 0,2,1,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY  : HALF-WAVELENGTH INVERTED VEE DIPOLE
CM             APEX HEIGHT ABOVE GROUND = 25'=7.62M
CM             BOTH ENDS AT HEIGHT = 10.43'=3.1802M
CM FREQUENCY : 3.8MHZ
CM GROUND(0) : EPSILON = 10    SIGMA=.003
CE
GW 1,10, 0,0,7.62, 0,19.2309,3.1802, .010265
GW 2,10, 0,0,7.62, 0,-19.2309,3.1802, .010265
GE 0
FR 0,0,0,0,3.8
GN 2,0,0,0,10,.003
EX 0,1,1,01,1,0
EX 0,2,1,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
```

```
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY  : HALF-WAVELENGTH INVERTED VEE DIPOLE
CM             APEX HEIGHT ABOVE GROUND = 35'=10.668M
CM             BOTH ENDS AT HEIGHT = 14.59'=4.4512M
CM FREQUENCY : 3.8MHZ
CM GROUND(0) : EPSILON = 10    SIGMA=.003
CE
GW 1,10, 0,0,10.668, 0,18.5465,3.9177, .010265
GW 2,10, 0,0,10.668, 0,-18.5465,3.9177, .010265
GE 0
FR 0,0,0,0,3.8
GN 2,0,0,0,10,.003
EX 0,1,1,01,1,0
EX 0,2,1,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY  : HALF-WAVELENGTH INVERTED VEE DIPOLE
CM             APEX HEIGHT ABOVE GROUND = 50'=15.24M
CM             BOTH ENDS AT HEIGHT = 10.13'=3.0889M
CM FREQUENCY : 3.8MHZ
CM GROUND(0) : EPSILON = 10    SIGMA=.003
CE
GW 1,10, 0,0,15.24, 0,15.5528,3.0889, .010265
GW 2,10, 0,0,15.24, 0,-15.5528,3.0889, .010265
GE 0
FR 0,0,0,0,3.8
GN 2,0,0,0,10,.003
EX 0,1,1,01,1,0
EX 0,2,1,01,1,0
PL3,2,1,0
```

```
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY  : HALF-WAVELENGTH INVERTED VEE DIPOLE
CM             APEX HEIGHT ABOVE GROUND = 90'=27.432M
CM             BOTH ENDS AT HEIGHT = 12.3128M=40.3859'
CM FREQUENCY : 3.8MHZ
CM GROUND(0) : EPSILON = 10    SIGMA=.003
CE
GW 1,10, 0,0,27.432, 0,12.6865,12.3128, .010265
GW 2,10, 0,0,27.432, 0,-12.6865,12.3128, .010265
GE 0
FR 0,0,0,0,3.8
GN 2,0,0,0,10,.003
EX 0,1,1,01,1,0
EX 0,2,1,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY  : HALF-WAVELENGTH INVERTED VEE DIPOLE
CM             APEX HEIGHT ABOVE GROUND =120'=36.576M
CM             BOTH ENDS AT HEIGHT = 70.37'=21.4567M
CM FREQUENCY : 3.8MHZ
CM GROUND(0) : EPSILON = 10    SIGMA=.003
CE
GW 1,10, 0,0,36.576, 0,12.6865,21.4567, .010265
GW 2,10, 0,0,36.576, 0,-12.6865,21.4567, .010265
GE 0
FR 0,0,0,0,3.8
GN 2,0,0,0,10,.003
```

```
EX 0,1,1,01,1,0
EX 0,2,1,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY  : HALF-WAVELENGTH INVERTED VEE DIPOLE
CM             APEX HEIGHT ABOVE GROUND =25'=7.62M
CM             BOTH ENDS AT HEIGHT = 13.3'=4.0576M
CM FREQUENCY : 7.2MHZ
CM GROUND(0) : EPSILON = 10    SIGMA=.003
CE
GW 1,10, 0,0,7.62, 0,9.7878,4.0576, .010265
GW 2,10, 0,0,7.62, 0,-9.7878,4.0576, .010265
GE 0
FR 0,0,0,0,7.2
GN 2,0,0,0,10,.003
EX 0,1,1,01,1,0
EX 0,2,1,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY  : HALF-WAVELENGTH INVERTED VEE DIPOLE
CM             APEX HEIGHT ABOVE GROUND = 35'=10.668M
CM             BOTH ENDS AT HEIGHT = 10.83'=3.3028M
CM FREQUENCY : 7.2MHZ
CM GROUND(0) : EPSILON = 10    SIGMA=.003
CE
GW 1,10, 0,0,10.668, 0,7.3652,3.3028, .010265
GW 2,10, 0,0,10.668, 0,-7.3652,3.3028, .010265
```

```
GE 0
FR 0,0,0,0,7.2
GN 2,0,0,0,10,.003
EX 0,1,1,01,1,0
EX 0,2,1,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY  : HALF-WAVELENGTH INVERTED VEE DIPOLE
CM             APEX HEIGHT ABOVE GROUND = 50'=15.24M
CM             BOTH ENDS AT HEIGHT = 23.8157'=7.2609M
CM FREQUENCY : 7.2MHZ
CM GROUND(0) : EPSILON = 10    SIGMA=.003
CE
GW 1,10, 0,0,15.24, 0,6.6952,7.2609, .010265
GW 2,10, 0,0,15.24, 0,-6.6952,7.2609, .010265
GE 0
FR 0,0,0,0,7.2
GN 2,0,0,0,10,.003
EX 0,1,1,01,1,0
EX 0,2,1,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY  : HALF-WAVELENGTH INVERTED VEE DIPOLE
CM             APEX HEIGHT ABOVE GROUND = 90'=27.432M
CM             BOTH ENDS AT HEIGHT = 63.8055M=19.4529'
CM FREQUENCY : 7.2MHZ
CM GROUND(0) : EPSILON = 10    SIGMA=.003
```

```
CE
GW 1,10, 0,0,27.432, 0,6.6952,19.4529, .010265
GW 2,10, 0,0,27.432, 0,-6.6952,19.4529, .010265
GE 0
FR 0,0,0,0,7.2
GN 2,0,0,0,10,.003
EX 0,1,1,01,1,0
EX 0,2,1,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY  : HALF-WAVELENGTH INVERTED VEE DIPOLE
CM             APEX HEIGHT ABOVE GROUND =120'=36.576M
CM             BOTH ENDS AT HEIGHT = 98.009'=29.8808M
CM FREQUENCY : 7.2MHZ
CM GROUND(0) : EPSILON = 10    SIGMA=.003
CE
GW 1,10, 0,0,36.576, 0,6.6952,29.8808, .010265
GW 2,10, 0,0,36.576, 0,-6.6952,29.8808, .010265
GE 0
FR 0,0,0,0,7.2
GN 2,0,0,0,10,.003
EX 0,1,1,01,1,0
EX 0,2,1,01,1,0
RP 0,181,1,1000,-90,90,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN
```

```
CM GEOMETRY  : HALF-WAVELENGTH INVERTED VEE DIPOLE
CM             APEX HEIGHT ABOVE GROUND =25'=7.62M
CM             BOTH ENDS AT HEIGHT = 11.72'=3.5741M
CM FREQUENCY : 14.2MHZ
CM GROUND(0) : EPSILON = 10    SIGMA=.003
CE
GW 1,10, 0,0,7.62, 0,3.3949,3.5741, .010265
GW 2,10, 0,0,7.62, 0,-3.3949,3.5741, .010265
GE 0
FR 0,0,0,0,14.2
GN 2,0,0,0,10,.003
EX 0,1,1,01,1,0
EX 0,2,1,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN
```

```
CM GEOMETRY  : HALF-WAVELENGTH INVERTED VEE DIPOLE
CM             APEX HEIGHT ABOVE GROUND = 35'=10.668M
CM             BOTH ENDS AT HEIGHT = 21.7204'=6.6221M
CM FREQUENCY : 14.2MHZ
CM GROUND(0) : EPSILON = 10    SIGMA=.003
CE
GW 1,10, 0,0,10.668, 0,3.3949,6.6221, .010265
GW 2,10, 0,0,10.668, 0,-3.3949,6.6221, .010265
GE 0
FR 0,0,0,0,14.2
GN 2,0,0,0,10,.003
EX 0,1,1,01,1,0
EX 0,2,1,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
```

```
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY  : HALF-WAVELENGTH INVERTED VEE DIPOLE
CM             APEX HEIGHT ABOVE GROUND = 50'=15.24M
CM             BOTH ENDS AT HEIGHT = 38.85'=11.8451M
CM FREQUENCY : 14.2MHZ
CM GROUND(0) : EPSILON = 10    SIGMA=.003
CE
GW 1,10, 0,0,15.24, 0,3.3949,11.8451, .010265
GW 2,10, 0,0,15.24, 0,-3.3949,11.8451, .010265
GE 0
FR 0,0,0,0,14.2
GN 2,0,0,0,10,.003
EX 0,1,1,01,1,0
EX 0,2,1,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121 1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY  : HALF-WAVELENGTH INVERTED VEE DIPOLE
CM             APEX HEIGHT ABOVE GROUND = 90'=27.432M
CM             BOTH ENDS AT HEIGHT = 76.7064M=23.3861'
CM FREQUENCY : 14.2MHZ
CM GROUND(0) : EPSILON = 10    SIGMA=.003
CE
GW 1,10, 0,0,27.432, 0,3.3949,23.3861, .010265
GW 2,10, 0,0,27.432, 0,-3.3949,23.3861, .010265
GE 0
FR 0,0,0,0,14.2
GN 2,0,0,0,10,.003
EX 0,1,1,01,1,0
EX 0,2,1,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
```

```
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY  : HALF-WAVELENGTH INVERTED VEE DIPOLE
CM             APEX HEIGHT ABOVE GROUND =120'=36.576M
CM             BOTH ENDS AT HEIGHT = 106.69'=32.5301M
CM FREQUENCY : 14.2MHZ
CM GROUND(0) : EPSILON = 10    SIGMA=.003
CE
GW 1,10, 0,0,36.576, 0,3.3949,32.5301, .010265
GW 2,10, 0,0,36.576, 0,-3.3949,32.5301, .010265
GE 0
FR 0,0,0,0,14.2
GN 2,0,0,0,10,.003
EX 0,1,1,01,1,0
EX 0,2,1,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY  : HALF-WAVELENGTH INVERTED VEE DIPOLE
CM             APEX HEIGHT ABOVE GROUND =25'=7.62M
CM             BOTH ENDS AT HEIGHT = 16.1464'=4.9227M
CM FREQUENCY : 21.3MHZ
CM GROUND(0) : EPSILON = 10    SIGMA=.003
CE
GW 1,10, 0,0,7.62, 0,2.2633,4.9227, .010265
GW 2,10, 0,0,7.62, 0,-2.2633,4.9227, .010265
GE 0
FR 0,0,0,0,21.3
GN 2,0,0,0,10,.003
EX 0,1,1,01,1,0
EX 0,2,1,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
```

```
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY  : HALF-WAVELENGTH INVERTED VEE DIPOLE
CM             APEX HEIGHT ABOVE GROUND = 35'=10.668M
CM             BOTH ENDS AT HEIGHT = 26.1438'=7.9707M
CM FREQUENCY : 21.3MHZ
CM GROUND(0) : EPSILON = 10    SIGMA=.003
CE
GW 1,10, 0,0,10.668, 0,2.2633,7.9707, .010265
GW 2,10, 0,0,10.668, 0,-2.2633,7.9707, .010265
GE 0
FR 0,0,0,0,21.3
GN 2,0,0,0,10,.003
EX 0,1,1,01,1,0
EX 0,2,1,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY  : HALF-WAVELENGTH INVERTED VEE DIPOLE
CM             APEX HEIGHT ABOVE GROUND = 50'=15.24M
CM             BOTH ENDS AT HEIGHT = 41.14'=12.5427M
CM FREQUENCY : 21.3MHZ
CM GROUND(0) : EPSILON = 10    SIGMA=.003
CE
GW 1,10, 0,0,15.24, 0,2.2633,12.5427, .010265
GW 2,10, 0,0,15.24, 0,-2.2633,12.5427, .010265
GE 0
FR 0,0,0,0,21.3
GN 2,0,0,0,10,.003
EX 0,1,1,01,1,0
EX 0,2,1,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
```

```
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY  : HALF-WAVELENGTH INVERTED VEE DIPOLE
CM             APEX HEIGHT ABOVE GROUND = 90'=27.432M
CM             BOTH ENDS AT HEIGHT = 24.7347M=81.1298'
CM FREQUENCY : 21.3MHZ
CM GROUND(0) : EPSILON = 10    SIGMA=.003
CE
GW 1,10, 0,0,27.432, 0,2.2633,24.7347, .010265
GW 2,10, 0,0,27.432, 0,-2.2633,24.7347, .010265
GE 0
FR 0,0,0,0,21.3
GN 2,0,0,0,10,.003
EX 0,1,1,01,1,0
EX 0,2,1,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY  : HALF-WAVELENGTH INVERTED VEE DIPOLE
CM             APEX HEIGHT ABOVE GROUND =120'=36.576M
CM             BOTH ENDS AT HEIGHT = 111.1221'=33.8787M
CM FREQUENCY : 21.3MHZ
CM GROUND(0) : EPSILON = 10    SIGMA=.003
CE
GW 1,10, 0,0,36.576, 0,2.2633,33.8787, .010265
GW 2,10, 0,0,36.576, 0,-2.2633,33.8787, .010265
GE 0
FR 0,0,0,0,21.3
GN 2,0,0,0,10,.003
EX 0,1,1,01,1,0
EX 0,2,1,01,1,0
PL3,2,1,0
```

```
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY  : HALF-WAVELENGTH INVERTED VEE DIPOLE
CM             APEX HEIGHT ABOVE GROUND =25'=7.62M
CM             BOTH ENDS AT HEIGHT = 18.3814'=5.6041M
CM FREQUENCY : 28.5MHZ
CM GROUND(0) : EPSILON = 10    SIGMA=.003
CE
GW 1,10, 0,0,7.62, 0,1.6914,5.6041, .010265
GW 2,10, 0,0,7.62, 0,-1.6914,5.6041, .010265
GE 0
FR 0,0,0,0,28.5
GN 2,0,0,0,10,.003
EX 0,1,1,01,1,0
EX 0,2,1,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY  : HALF-WAVELENGTH INVERTED VEE DIPOLE
CM             APEX HEIGHT ABOVE GROUND = 35'=10.668M
CM             BOTH ENDS AT HEIGHT = 28.3788'=8.6521M
CM FREQUENCY : 28.5MHZ
CM GROUND(0) : EPSILON = 10    SIGMA=.003
CE
GW 1,10, 0,0,10.668, 0,1.6914,8.6521, .010265
GW 2,10, 0,0,10.668, 0,-1.6914,8.6521, .010265
GE 0
FR 0,0,0,0,28.5
GN 2,0,0,0,10,.003
```

```
EX 0,1,1,01,1,0
EX 0,2,1,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0.0,3,0
EN


CM GEOMETRY  : HALF-WAVELENGTH INVERTED VEE DIPOLE
CM             APEX HEIGHT ABOVE GROUND = 50'=15.24M
CM             BOTH ENDS AT HEIGHT = 43.3750'=13.2241M
CM FREQUENCY : 28.5MHZ
CM GROUND(0) : EPSILON = 10    SIGMA=.003
CE
GW 1,10, 0,0,15.24, 0,1.6914,13.2241, .010265
GW 2,10, 0,0,15.24, 0,-1.6914,13.2241, .010265
GE 0
FR 0,0,0,0,28.5
GN 2,0,0,0,10,.003
EX 0,1,1,01,1,0
EX 0,2,1,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY  : HALF-WAVELENGTH INVERTED VEE DIPOLE
CM             APEX HEIGHT ABOVE GROUND = 90'=27.432M
CM             BOTH ENDS AT HEIGHT = 25.4161M=83.3648'
CM FREQUENCY : 28.5MHZ
CM GROUND(0) : EPSILON = 10    SIGMA=.003
CE
GW 1,10, 0,0,27.432, 0,1.6914,25.4161, .010265
GW 2,10, 0,0,27.432, 0,-1.6914,25.4161, .010265
```

```
GE 0
FR 0,0,0,0,28.5
GN 2,0,0,0,10,.003
EX 0,1,1,01,1,0
EX 0,2,1,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN

CM GEOMETRY  : HALF-WAVELENGTH INVERTED VEE DIPOLE
CM             APEX HEIGHT ABOVE GROUND =120'=36.576M
CM             BOTH ENDS AT HEIGHT = 113.3571'=34.5601M
CM FREQUENCY : 28.5MHZ
CM GROUND(0) : EPSILON = 10    SIGMA=.003
CE
GW 1,10, 0,0,36.576, 0,1.6914,34.5601, .010265
GW 2,10, 0,0,36.576, 0,-1.6914,34.5601, .010265
GE 0
FR 0,0.0,0,28.5
GN 2,0.0,0,0,10,.003
EX 0,1,1,01,1,0
EX 0,2,1,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121.1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN

CM GEOMETRY  : QUARTER WAVELENGTH MONOPOLE
CM             WITH QUARTER WAVELENGTH 4 RADIAL WIRES
CM             BURIED 2" =.0508M DEEP
CM FREQUENCY : 3.8MHZ
CM             WAVELENGTH (FOR SKY WAVES)    = 78.9473M
```

```
CM              WAVELENGTH (FOR GROUND WAVES) = 18.939M
CM WIRE       : #12 ( RADIUS R=.010265M )
CM GROUND(0)  : EPSILON = 10     SIGMA=.003
CE
GW 2,1, 0,0,0, 1.5773,0,-.0508, .010265
GW 3,2, 1.5773,0,-.0508, 4.7337,0,-.0508, .010265
GR 0,4
GW 1,10, 0,0,0, 0,0,19.7368, .010265
GE 0
FR 0,0,0,0,3.8
GN 2,0,0,0,10,.003
EX 0,1,1,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
RP0,1,121,1500,20,0.0,0,3,0
RP0,1,121,1500,10,0.0,0,3,0
RP0,1,121,1500,0,0.0,0,3,0
EN


CM GEOMETRY   : QUARTER WAVELENGTH MONOPOLE
CM              WITH QUARTER WAVELENGTH 15 RADIAL WIRES
CM              BURIED 2" =.0508M DEEP
CM FREQUENCY  : 3.8MHZ
CM              WAVELENGTH (FOR SKY WAVES)    = 78.9473M
CM              WAVELENGTH (FOR GROUND WAVES) = 18.939M
CM WIRE       : #12 ( RADIUS R=.010265M )
CM GROUND(0)  : EPSILON = 10     SIGMA=.003
CE
GW 2,1, 0,0,0, 1.5773,0,-.0508, .010265
GW 3,2, 1.5773,0,-.0508, 4.7337,0,-.0508, .010265
GR 0,15
GW 1,10, 0,0,0, 0,0,19.7368, .010265
GE 0
FR 0,0,0,0,3.8
GN 2,0,0,0,10,.003
EX 0,1,1,01,1,0
PL3,2,1,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL3,2,2,0
RP1,1,121,0,7.62,0.0,0,3,1609.3
PL0,0,0,0
RP0,1,121,1500,80,0.0,0,3,0
RP0,1,121,1500,70,0.0,0,3,0
RP0,1,121,1500,60,0.0,0,3,0
RP0,1,121,1500,50,0.0,0,3,0
RP0,1,121,1500,40,0.0,0,3,0
RP0,1,121,1500,30,0.0,0,3,0
```

INITIAL DISTRIBUTION LIST

		No. Copies
1.	Library, Code 0142 Naval Postgraduate School Monterey, CA 93943-5002	2
2.	Chairman, Code EC Department of Electrical and Computer Engineering Naval Postgraduate School Monterey, CA 93943-5000	1
3.	Director, Research Administration, Code 012 Naval Postgraduate School Monterey, CA 93943-5000	1
4.	Naval Postgraduate School Dr. Richard W. Adler, Code EC/Ab Monterey, CA 93943-5000	5
5.	Naval Postgraduate School Prof. S. Jauregui, Code EC/Ja Monterey, CA 93943-5000	1
6.	Penn State University ATTN: J. K. Breakall, CSSL 211 EE East University Park, PA 16802	5
7.	U.S. Army Information Systems Engineering and Integration Center ATTN: Commander (Janet McDonald, ASB-SET-P) Ft. Huachuca, AZ 85613-5300	5
8.	Gnkur. Bsk. ligi Muhabere Bilgi Destek Daire Bsk. ligi Bakanliklar - ANKARA - TURKEY	1
9.	Kara Kuvvetleri Komutanligi Muhabere Bsk. ligi Bakanliklar - ANKARA - TURKEY	1
10.	Deniz Kuvvetleri Komutanligi Muhabere Bsk. ligi Bakanliklar - ANKARA - TURKEY	1
11.	Hava Kuvvetleri Komutanligi Muhabere Bsk. ligi Bakanliklar - ANKARA - TURKEY	1

12. Golcuk Tersane Komutanligi — 1
AR-GE
Golcuk - KOCAELI - TURKEY

13. Kara Harp Okulu Komutanligi — 1
Okul Kutuphanesi
Bakanliklar - ANKARA - TURKEY

14. Deniz Harp Okulu Komutanligi — 1
Okul Kutuphanesi
Tuzla - ISTANBUL - TURKEY

15. Hava Harp Okulu Komutanligi — 1
Okul Kutuphanesi
Yesilyurt - ISTANBUL - TURKEY

16. Mu.Ok. ve Egt. Mrk. K. ligi — 1
Muhabere Okulu
Mamak - ANKARA - TURKEY

17. Orta Dogu Teknik Universitesi — 1
Okul Kutuphanesi
ANKARA - TURKEY

18. Bogazici Universitesi — 1
Okul Kutuphanesi
ISTANBUL - TURKEY

19. Nedim KATAL — 1
Kuyubasi sok. Cimen Apt. No:13
Kiziltoprak - ISTANBUL - TURKEY

20. Gurkan TURKES — 1
Dz. Kd. Utgm.
Denizalti Filosu K.ligi - Golcuk - KOCAELI - TURKEY

21. Defense Technical Information Center — 2
Cameron Station
Alexandria, Virginia 22304-6145